



Features

- 2 foot T8 tube for F32T8 replacement
- Environmentally friendly with no mercury
- Built-in driver for easy installation
- High lumen efficiency & high CRI
- Built with Samsung LED Chips
- Five years limited warranty
- UL Classified & DLC Certified
- Operating Temp: 14 to 105 Deg. F




Specifications

Model	Input	Frequency	Wattage	PF	CCT	CRI	Lumen*
ST8LED-24-9W	100-277V	50-60Hz	9W	>90	4000K-6000K	> 80	950

*nominal lumen output

Dimensions

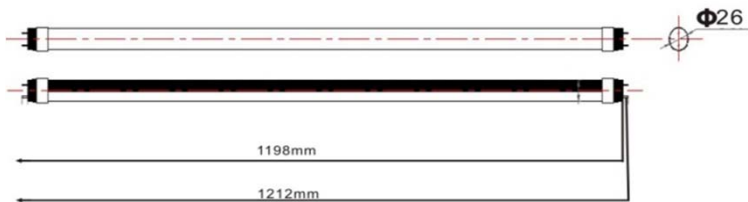

Nominal length: 24"

Pin to pin: 23.7"

Base to base: 23.2"

$\phi = 1.0"$

Installation

Warning: LED tubes cannot be used with shunted sockets. Use with bi-pin rapid start sockets only

1. Make sure that the supply voltage (input) is disconnected
2. Remove existing fluorescent lamp
3. Remove electronic ballast, starter, and/or capacitor
4. Rewire the light fixture as shown in the circuit diagram
5. One side will have "AC" to indicate the side for input
6. Insert LED tube into lamp socket

